

POLGLOS SUPER MATT ACRYLIC BOARDS & DECORATIVE MATS

POLGLOS® SUPER MATT boards are manufactured on the basis of raw MDF board with a thickness of 17 mm. The top of the boards is covered with a layer of acrylic 0.3 - 1.0 mm, depending on the color, or with a decorative mat in the form of PET foil 0.3 mm. The top layer is additionally covered with a protective film, protecting the surface against scratching. (Some textured decors do not have foil). The back is covered with a 0.2 - 0.8 mm thick layer of counter-pressure pvc/hips material matching the decor. The back layer eliminates the possibility of the board stretching. During the production process, only waterproof PUR glue is used, thanks to which the boards do not swell and do not acquire moisture from the outside. The thickness of the board for acrylics is 18.0 +/- 0.4 mm and for decorative mats around 17.6 mm.




POLGLOS SUPER MATT	Technical details
Board dimensions	2800 × 1220 mm
Thickness	18.0 +/-0.4 mm for acrylics 17.6 mm for decorative mats/foils
Top layer	acrylic/decorative mat protected with film (some decorative mats do not have protective film)
Core	mdf 17mm
Reverse side	antitwisting reverse in board colour, pvc/hips
Possible modifications	chipboard, plywood, light foam, flame retardant mdf
On request	special quotations

Areas of application

Polglos super matt boards are used indoors in a vertical orientation. They can be used as furniture fronts or wall decorations. We do not use it for external use. We do not use it on kitchen countertops. Can be used in horizontal orientation on coffee tables, office furniture and similar surfaces, not subject to abrasion and increased intensity of daily use.

- kitchen and bathroom furniture
- for built-in furniture
- wardrobes and sideboards
- for interior furnishings in residential construction
- stands and halls
- catering facilities
- health care facilities, clinics and offices
- modular houses, houses on the water
- trailers and campers
- wall decorations

Product features

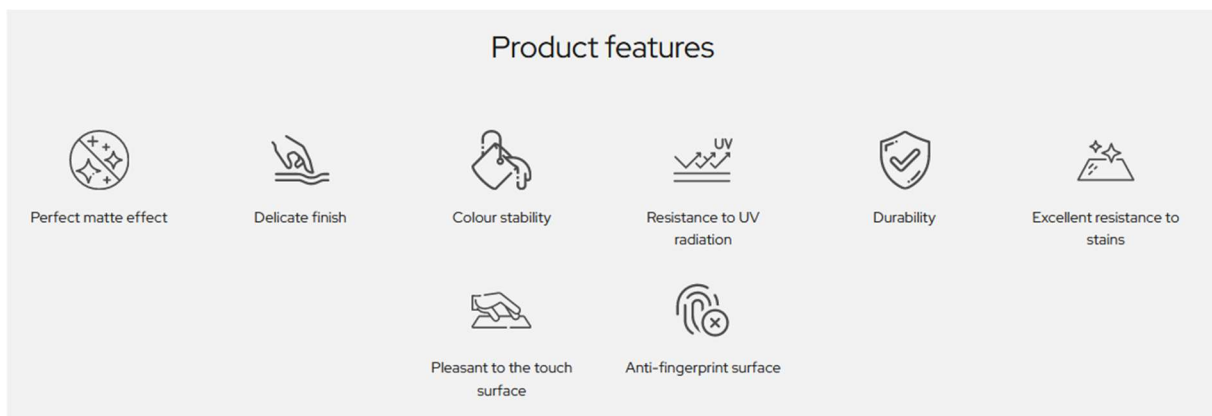

Care & cleaning instructions

After removing the protective foil, the board surface is ready for use. Super matte boards do not require hardening. Daily use: clean the surface with a microfiber cloth and lukewarm water with mild soap.